

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

EP 1 219 455 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
03.07.2002 Bulletin 2002/27

(51) Int Cl.7: **B41J 15/16**, **B41J 13/14**,
B65H 23/04

(21) Application number: 01131029.9

(22) Date of filing: 28.12.2001

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE TR
Designated Extension States:
AL LT LV MK RO SI

(71) Applicant: **SEIKO EPSON CORPORATION**
Tokyo 160-0811 (JP)

(72) Inventor: **Fujioka, Satoshi**,
c/o Seiko Epson Corporation
Suwa-shi, Nagano (JP)


(30) Priority: 28.12.2000 JP 2000404660
17.01.2001 JP 2001009527
12.12.2001 JP 2001378132

(74) Representative: **HOFFMANN - EITLE**
Patent- und Rechtsanwälte
Arabellastrasse 4
81925 München (DE)

(54) Recording apparatus including a warping part

(57) A recording apparatus has a feeding unit (110) for storing and feeding a recording medium, a recording unit (120) for recording information on the recording medium having been fed from the feeding unit, and a discharging unit (130) for discharging outside the recording medium having been transported through the recording

unit. In the recording apparatus, a warping part (131a) for warping the recording medium and supporting parts (133) for supporting both side edges of the recording medium warped by the warping part are formed on a guide member disposed downstream of the recording unit.

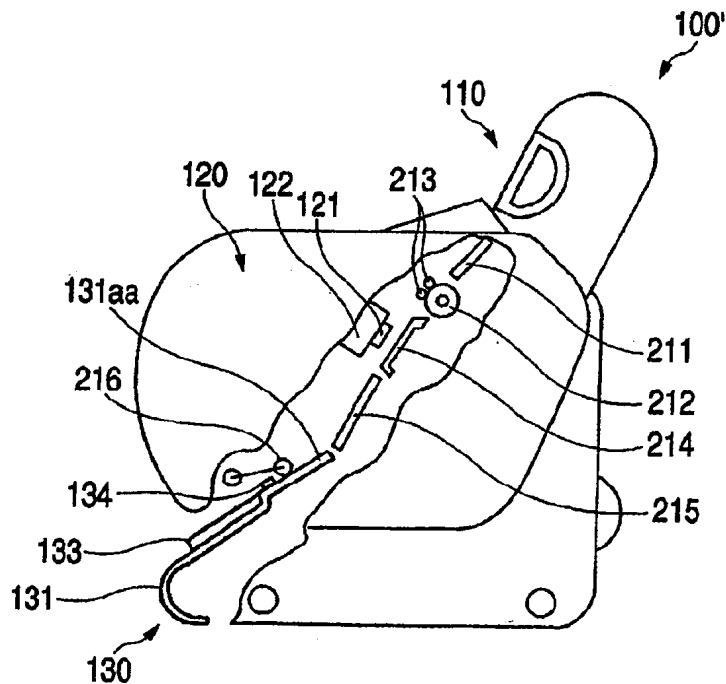FIG. 15

Description

BACKGROUND OF THE INVENTION

[0001] The present invention relates to a recording apparatus for recording information in a recording medium, and more particularly to a recording apparatus of which the recording medium transporting unit is contrived.

[0002] A conventional large printer as a recording apparatus is made up of a sheet supply unit for supplying a rolled sheet as a recording medium, a printing unit for recording information on the supplied rolled sheet, and a sheet discharge unit for discharging the printed rolled sheet, and those units are disposed in this order from the upper part. To use such a large printer as a large ink jet printer, the user pulls out the leading end of the rolled sheet that is contained in the sheet supply unit. The user moves the leading end of the rolled sheet on and along a flat, sheet feeding guide serving as a sheet transporting surface, puts it between a sheet feeding roller and a follower roller, and starts the printer.

[0003] The ink jet printer ejects ink drops from the nozzle orifices of a printing head to record information on the rolled sheet, while feeding the rolled sheet onto the platen by rotating the sheet feeding roller. Then, the printer rotates a sheet discharging roller to discharge outside the rolled sheet on and along a flat, sheet discharging guide serving as a sheet transporting surface.

[0004] In the printer, it is a common practice to use for the recording medium, rolled sheets in which fibers are extended in a sheet transporting direction, namely, the sub-scan direction, and which are arranged side by side in a direction perpendicular to the sheet transporting direction, i.e., the main scan direction. At the completion of the printing on the rolled sheet, the rolled sheet is in a water-absorbing state since ink has been attached thereto. In this state, the rolled sheet is made wavy, so-called cockling, in a direction in which the binding of fibers is weak, namely, the main scan direction.

[0005] In the conventional printer, the sheet transporting surface ranging from the platen to the sheet discharging guide is flat. Therefore, when the cockling grows, there is a fear that the recording surface of the rolled sheet is rubbed by the printing head located above the platen.

[0006] As shown in Fig. 22A, the cockling may be depicted by traces which slope down toward an incomplete printing portion (hatched area in Fig. 22A) of the rolled sheet R of which the printing is not yet completed at the side edges of the rolled sheet near that portion of the rolled sheet. As shown, the ridge lines and the root lines of the cockling converge toward the incomplete printing portion of the rolled sheet at the side edges of the rolled sheet R. As a result, as shown in Fig. 22B, the rolled sheet rises in the vicinity of the incomplete printing portion to possibly rub against the printing head.

SUMMARY OF THE INVENTION

[0007] Accordingly, an object of the present invention is to provide a recording apparatus which is capable of preventing the cockling from occurring in the recording medium.

(1) According to the invention, there is provided a first recording apparatus having a feeding unit for storing and feeding a recording medium, a recording unit for recording information on the recording medium having been fed from the feeding unit, and a discharging unit for discharging outside the recording medium having been transported through the recording unit, the improvement being characterized in that a warping part for warping the recording medium is formed on a guide member which is disposed downstream of the recording unit and inclined in a gravity direction.

With such an arrangement, even if the cockling occurs in a recording medium of which the recording has been completed in the recording unit, the recording medium may be bent in a direction orthogonal to directions in which the cockling occurs. Accordingly, stress acting to spread the recording medium in directions of the cockling generation is generated at the bending part. As a result, there is completely eliminated a chance of generating the cockling in the recording medium.

(2) In the recording apparatus according to (1), the warping part includes a flat surface which is uniform over a direction orthogonal to the transporting direction of the recording medium. With this technical feature, the recording medium may be transported on and along the warping part in flat state, whereby preventing the re-occurrence of the cockling.

(3) In the recording apparatus according to (1) or (2), a suction unit for sucking the recording medium is disposed near the warping part. With this feature, the recording medium warped by the warping part is easy to come in contact with the suction unit. As a result, the suction performance of the recording medium is improved.

(4) In the recording apparatus according to any of (1) through (3), a recording medium discharge roller for discharging the recording medium is disposed immediately after the warping part. This feature enables the recording medium of which the cockling is completely removed to be smoothly discharged outside.

(5) In the recording apparatus according to any of (1) through (4), the warping part includes an inclined recording medium transporting surface for changing a transporting direction of the incoming recording medium to warp the recording medium. With this feature, the recording medium may be transported along the flat surface and then the inclined surface. Accordingly, the recording medium is easily

warped.

(6) According to another aspect of the invention, there is provided a second recording apparatus having a feeding unit for storing and a feeding recording medium, a recording unit for recording information on the recording medium having been fed from the feeding unit, and a discharging unit for discharging outside the recording medium having been transported through the recording unit, the improvement being characterized in that a warping part for warping the recording medium and supporting parts for supporting both side edges of the recording medium warped by the warping part are formed on a guide member disposed downstream of the recording unit.

With such an arrangement, even if the cockling occurs in a recording medium of which the recording has been completed in the recording unit, the recording medium may be bent in a direction orthogonal to directions in which the cockling occurs. Accordingly, stress acting to spread the recording medium in directions of the cockling generation is generated at the bending part. As a result, there is completely eliminated a chance of generating the cockling in the recording medium. Further, both side ends of the boundary region between a not yet recorded portion suffering from the cockling and a recorded portion are lifted by the supporting parts. The recording medium sags at a part of the recording medium between the supporting parts by its weight, and is concavely curved. Accordingly, there is no chance that the recording medium rises in the boundary region of the recording medium.

(7) In the recording apparatus according to (6), the warping part includes an inclined, recording medium transporting surface for changing a transporting direction of the incoming recording medium to warp the recording medium, and the supporting parts have support surfaces which are flush with the recording medium transporting surface. With this feature, the recording medium may be transported along the flat surface and then the inclined surface. Accordingly, the recording medium is easily warped. Further, the recording medium may be smoothly transported from the recording medium transporting surface to the support surfaces. Accordingly, the recording medium may be concavely curved with good reliability.

(8) In the recording apparatus according to (6) or (7), a plurality of the supporting parts are arranged such that a length of the arrangement of the supporting parts is somewhat narrower than each of the recording mediums of the different widths. Therefore, even if the recording medium is changed to another kind of recording medium, both side edges of the recording medium can be supported with good reliability.

(9) In the recording apparatus according to (7) or

(8), an auxiliary supporting part for supporting both side edges of the recording medium is provided on the recording medium transporting surface. With such the arrangement of an auxiliary supporting part, even when the recording medium having a large rigidity is used and is not concavely curved between the supporting parts, the recording medium may be convexly curved by the auxiliary supporting part. As a result, the recording medium may be concavely curved between the auxiliary supporting part and the supporting parts.

(10) In the recording apparatus according to any of (5), (7), (8) and (9), the inclined recording medium transporting surface of the warping part is formed by bending a plate like member in a direction orthogonal to the medium transporting direction. This feature provides the warping part having a simple structure, and hence a simple manufacturing process of manufacturing the recording apparatus.

(11) In the recording apparatus according to any of (1) through (10), the warping part is warped so that the recording surface of the recording medium is concavely curved. Therefore, the recording medium suffering from the cockling may be pressed against the recording medium transporting surface, to thereby perfectly preventing the rubbing of the recording medium against the recording head.

(12) In the recording apparatus according to (11), an inclination angle of the inclined, recording medium transporting surface of the warping part is 6°. If the inclination angle is so selected, no crease is formed in the recording medium, and the formation of the cockling in the recording medium is completely removed.

(13) In the recording apparatus according to (1), the warping part includes a first sheet transporting surface ascendingly inclined and a second sheet transporting surface descendingly inclined with respect to the sheet transporting path of the recording medium.

BRIEF DESCRIPTION OF THE DRAWINGS

[0008]

Fig. 1 is a perspective view showing a printer according to an embodiment of the present invention; Fig. 2 is a perspective view showing the inner structure of the Fig. 1 printer;

Fig. 3 is a first diagram showing a procedure to use the Fig. 1 printer;

Fig. 4 is a second diagram showing a procedure to use the Fig. 1 printer;

Fig. 5 is a third diagram showing a procedure to use the Fig. 1 printer;

Fig. 6 is a fourth diagram showing a procedure to use the Fig. 1 printer;

Fig. 7 is a third diagram showing a procedure to use

the Fig. 1 printer;

Fig. 8 is a sixth diagram showing a procedure to use the Fig. 1 printer;

Fig. 9 is a seventh diagram showing a procedure to use the Fig. 1 printer;

Fig. 10 is an eighth diagram showing a procedure to use the Fig. 1 printer;

Fig. 11 is a side view, partly broken, showing a sheet transporting surface of a recording medium, which is essential to the present invention;

Fig. 12 is a diagram showing the detail of a sheet discharging guide shown in Fig. 11;

Figs. 13A and 13B are side views for explaining the operation of a sheet discharging guide shown in Fig. 11;

Fig. 14 is a perspective view showing an ink jet printer having another sheet transporting surface of the recording medium, which is essential to the present invention;

Fig. 15 is a side view, partly broken, showing the sheet transporting surface shown in Fig. 14;

Fig. 16 is a plan view showing a sheet transporting surface shown in Fig. 14;

Fig. 17 is a diagram showing the detail of a sheet discharging guide shown in Fig. 15;

Fig. 18 is a plan view showing the detail of a sheet discharging guide shown in Fig. 15;

Figs. 19A and 19B are side views for explaining the operation of a sheet discharging guide shown in Fig. 15;

Figs. 20A and 20B show a plan view and a side view respectively for explaining the operation of a sheet discharging guide shown in Fig. 15;

Figs. 21A and Fig. 21B show another plan view and another side view respectively for explaining the operation of a sheet discharging guide shown in Fig. 15; and

Figs. 22A and 22B show another plan view and another side view for explaining the problems of the conventional technique.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0009] The preferred embodiments of the present invention will be described in detail with reference to the accompanying drawings.

[0010] Fig. 1 is a perspective view showing an ink jet printer as one form of a recording apparatus, which is an embodiment of the invention. Fig. 2 is a perspective view showing the inner structure of a key portion of the ink jet printer. An ink jet printer 100 shown in Figs. 1 and 2 is a large printer which is capable of printing on a print sheet of relatively large size, such as A1 or B1 size in JIS standard. The ink jet printer is made up of a sheet supply unit 110, a printing unit 120, a sheet discharge unit 130 and leg means 140, and those units and part are disposed in this order. The printing unit 120 and the

sheet discharge unit 130 are assembled into a main body, and the sheet supply unit 110 and the leg means 140 are separable from the main body.

[0011] The sheet supply unit 110 is provided such that it projects backwardly from the upper part of the main body 120 and 130, as shown in Fig. 1. As shown in Fig. 2, two rolled sheet holders 111, arranged in vertical direction while being aslant, are provided within the sheet supply unit 110. Those holders allow rolled sheets to be set thereon, respectively. A rolled sheet cover 112 of the flip-up type, which may be turned for opening and closing, as shown in Figs. 1 and 2, is mounted on the front surface of the sheet supply unit 110 in a state that it covers the rolled sheet holders 111.

[0012] Each rolled sheet holder 111, as shown in Fig. 2, includes a spindle 113 for holding a rolled sheet, and a couple of spindle receivers 114 and 115 which are mounted in both the side walls of the sheet supply unit 110. The spindle 113 is detachably set to those spindle receivers such that it is bridged between them. To set the spindle 113 to the spindle receivers 114 and 115, a rolled sheet is applied to a middle part of the spindle 113, and both ends of the spindle are rotatably put in the spindle receivers 114 and 115. As shown in Figs. 1 and 2, the rolled sheet cover 112 is rotatably supported at the upper part, and may be opened by lifting the lower part of the cover, and closed by pushing it down.

[0013] The printing unit 120, as shown in Fig. 2, is provided with a carriage 122 on which a printing head 121 mounted, a flexible flat cable (referred to as an FFC) 123 interconnecting the printing head 121 and a control unit (not shown) for executing the printing, an ink tube 124 interconnecting the printing head 121 and an ink cartridge (not shown) containing ink, a sheet feeding roller (not shown) for feeding a rolled sheet in the sub-scan direction, and a sheet suction means (not shown) preventing the rolled sheet from rising. An upper cover 125 and a front cover 126, as shown in Figs. 1 and 2, are respectively mounted on the upper part and the front part of the printing unit 120, and cover the printing head 121, the carriage 122 and the like.

[0014] The printing head 121 includes a printing head for ejecting black ink and a plurality of color printing heads for ejecting such color inks as yellow, light cyan, cyan, light magenta, magenta inks and the like. The printing head 121 includes pressure generating chambers and nozzle orifices connecting to the former. When ink is stored in each pressure generating chamber and the pressure generating chamber is pressurized by a predetermined pressure, the printing head 121 ejects an ink drop of the controlled size from the nozzle orifice toward the rolled sheet.

[0015] The carriage 122, as shown in Fig. 2, is suspended from a rail 127 which is extended in the main scan direction, by the roller, and is coupled to a carriage belt 128. When the carriage belt 128 is turned by a carriage driver (not shown), the carriage is reciprocally moved while being guided along the rail 127, with the

movement of the carriage belt 128.

[0016] The FFC 123 is connected at one end to a connector of the control unit, and at the other end to the connector of the printing head 121. The FFC thus connected transmits a print signal from the control unit to the printing head 121. The ink tubes 124 are provided and laid for the respective color inks. Those ink tubes are connected at first ends to the color ink cartridges by way of ink pressure supplying means, and at the second ends to the color printing heads 121.

[0017] The ink tubes 124 supply the respective color inks as pressurized by the ink pressurize-supplying means, from the ink cartridges to the printing heads 121, respectively. As shown in Figs. 1 and 2, the front cover 126 is rotatably supported at the lower part, and may be opened by lifting the upper part of the cover, and closed by pushing it down.

[0018] As shown in Figs. 1 and 2, the sheet discharge unit 130 includes a sheet discharging guide 131 which forms a part of a path for transporting a rolled sheet in the sub-scan direction, and a sheet discharge roller (not shown), which transports a rolled sheet in the sub-scan direction. A cartridge holder 150 for containing and holding ink cartridges is provided at a right-side location as viewed from the front side of the sheet discharge unit 130, as shown in Figs. 1 and 2.

[0019] The leg means 140 include two supports 142 with rollers 141 for apparatus movement, and a reinforcing bar 143 bridged between those supports 142, as shown in Figs. 1 and 2. The sheet supply unit 110 and the main body 120 and 130 are placed on the supports 142 and fastened to the latter by means of screws.

[0020] With such a mechanical arrangement, to use the ink jet printer 100, the spindle 113 forming the rolled sheet holder 111 is first removed from the sheet supply unit 110. A rolled sheet holder 113a inserted in the spindle 113 is pulled off from one end of the spindle 113, as shown in Fig. 3.

[0021] As shown in Fig. 4, one end of the spindle 113 is inserted into one end of a shaft hole C of the rolled sheet R, and the spindle is passed therethrough. As shown in Fig. 5, one end of the shaft hole C of the rolled sheet R is fit to a rolled sheet holder 113b, which is applied and fixed to the other end of the spindle 113. Subsequently, the rolled sheet holder 113a is applied to the one end of the spindle 113, and is fitted into the other end of the shaft hole C of the rolled sheet R. As a result, the rolled sheet R is rotatable together with the spindle 113.

[0022] Then, as shown in Fig. 6, the user holds both ends of the rolled sheet R loaded spindle 113 with his hands, and puts it obliquely with respect to the cross direction of the ink jet printer 100, viz., puts it in a state that the other end of the rolled sheet R loaded spindle 113 is directed to the spindle receiver 114.

[0023] The spindle receiver 114 may be turned in the horizontal direction. Usually, recesses 114a and 115a of the spindle receivers 114 and 115 for receiving the ends

of the spindle 113, are opposed to each other. When the spindle 113 having the rolled sheet R loaded thereto is set to the printer, the spindle receiver 114 is turned to have an angle of about 45° with respect to the spindle receiver 115.

[0024] Thereafter, the other end of the spindle 113 having the rolled sheet R loaded thereto is put on the recess 114a, and in this state, the spindle receiver 114 is turned together with the spindle 113 on which the rolled sheet R is loaded. The recesses 114a and 115a of the spindle receivers 114 and 115 are opposed to each other, and then the one end of the spindle 113 on which the rolled sheet R is loaded is put on the recess 115a of the spindle receiver 115. In this way, the spindle 113 on which the rolled sheet R is loaded may be easily attached to the sheet supply unit 110.

[0025] The leading end of the rolled sheet R, as shown in Fig. 8, is pulled down, and moved along the transporting path of the printing unit 120 and further to the transporting path of the sheet discharge unit 130 as shown in Fig. 9. The rolled sheet R, as shown in Fig. 10, is rolled back, and the leading end of the rolled sheet R is set at markers M of the sheet discharging guide 131. Then, the ink jet printer 100 is started, and ejects ink drops while feeding the rolled sheet R in the sub-scan direction and moving the printing head 121 in the main scan direction. It records given information on the rolled sheet R and discharges the resultant.

[0026] Fig. 11 is a side view, partly broken, showing a sheet transporting surface of a recording medium, which is essential to the present invention. A sheet transporting path, which is extended from the sheet supply unit 110 through the printing unit 120 to the sheet discharge unit 130, is inclined over a range from the upper rear side to the lower front side of the ink jet printer 100.

[0027] The sheet transporting path includes a flat, sheet feeding guide 211 disposed ranging from the sheet supply unit 110 and the printing unit 120, a sheet feeding roller 212 and a follower roller 213 which are oppositely disposed and may come in contact with each other and may be separated from each other, a flat platen 214 disposed in opposition to the printing head 121 mounted on the carriage 122, a flat sheet suction unit 215 disposed ranging from the printing unit 120 to the sheet discharge unit 130, a sheet discharging guide 131 which is disposed in the sheet discharge unit 130 with its part being projected, and a sheet discharge roller 216 disposed facing the sheet discharging guide 131.

[0028] The sheet feeding guide 211, the platen 214 and the sheet suction unit 215 serve as sheet transporting surfaces, and are flat in shape. Accordingly, the rolled sheet extending from the sheet feeding guide 211 through the platen 214 to the sheet suction unit 215 is transported in a state that it is flat. The sheet discharging guide 131 also serves as a sheet transporting surface. As shown in Figs. 11 and 12, the sheet discharging guide 131 includes a warping part 131a for warping the

incoming rolled sheet.

[0029] The sheet discharging guide 131 is formed with a metal plate. The warping part 131a is bent such that the transporting surface of the metal plate, which is closer to the printing unit 120, is convexly curved in a direction orthogonal to the rolled sheet transporting direction. Specifically, provided at a location of the sheet discharging guide 131 which is closer to the printing unit 120 is the warping part 131a which contains an ascending sheet transporting surface 131aa ascendingly inclined with respect to the sheet transporting surface of the sheet suction unit 215, and a descending sheet transporting surface 131ab descendingly inclined with the same.

[0030] With such a mechanical arrangement, after the leading end of the rolled sheet R passes the sheet suction unit 215 and reaches the sheet discharging guide 131 as shown in Fig. 13A, it is guided along the ascending sheet transporting surface 131aa of the warping part 131a. Accordingly, the rolled sheet R, as shown in Fig. 13B, is bent at and along a boundary line A between the sheet suction unit 215 and the sheet discharging guide 131, viz., the printing surface of the rolled sheet R is concavely curved.

[0031] Thus, the rolled sheet R is bent in a direction orthogonal to the main scan direction by the warping part 131a. Accordingly, even if the rolled sheet R of which the printing has been completed in the printing unit 120 is cockled in the main scan direction, stress acting to spread the rolled sheet R in directions of the cockling generation is generated at the bending part. As a result, there is completely eliminated a chance of generating the cockling in the rolled sheet.

[0032] The printing surface of the rolled sheet R is warped, by the warping part 131a, to be concavely curved. Further, the rolled sheet R is pressed against the ascending sheet transporting surface 131aa of the warping part 131a by means of the sheet discharge roller 216. Accordingly, the rolled sheet R suffering from the cockling, which is located closer to the sheet suction unit 215, can reliably be pressed against the sheet suction unit 215, to thereby perfectly preventing the rubbing of the rolled sheet R against the printing head 121.

[0033] An inclination angle of the ascending sheet transporting surface 131aa of the warping part 131a was studied. Here the inclination angle is defined as an angle formed between the ascending sheet transporting surface 131aa and the flat sheet transporting surface of the sheet suction unit 215. The following fact was found and confirmed. When the inclination angle is set at 6°, no crease is formed in the rolled sheet R along the boundary line A between the sheet suction unit 215 and the sheet discharging guide 131. Accordingly, no cockling occurs. In this respect, in design, it is desirable to select the inclination angle of the ascending sheet transporting surface 131aa of the warping part 131a to be 6°.

[0034] In the embodiment mentioned above, the rolled sheet R is warped so that its printing surface is

concavely curved. It is evident that where the rolled sheet R is warped such that the printing surface of the rolled sheet is convexly curved, no cockling occurs in the rolled sheet.

5 [0035] Fig. 14 is a perspective view showing, while corresponding to Fig. 1 in the first embodiment, an ink jet printer having another sheet transporting surface of the recording medium, which is essential to the present invention. Fig. 15 is a side view, partly broken, showing the sheet transporting surface, while corresponding to Fig. 11. Fig. 16 is a plan view showing the sheet transporting surface. Fig. 17 is a perspective view showing a sheet discharging guide for the sheet transporting surface, while corresponding to Fig. 12. In those figures, like or equivalent portions are designated by like reference numerals.

10 [0036] As shown in Figs. 14 through 17, in an ink jet printer 100, supporting parts 133, bar-shaped, for supporting both side edges of the rolled sheet R, are provided on the sheet transporting surface 131b of the sheet discharging guide 131, which is located downstream of the descending sheet transporting surface 131ab. The upper surfaces of the supporting parts 133 are flush with the ascending sheet transporting surface 131aa. A plurality of the supporting parts 133, as illustrated in Fig. 18, are arranged such that a length of the arrangement of the supporting parts 133 is somewhat narrower than each of the widths W1, W2, W3 of the rolled sheets R of different sizes, for example, 24 inches, 36 inches and 44 inches.

15 [0037] With such the arrangement of the supporting parts 133, as shown in Fig. 19A, the leading end of the rolled sheet R passes the sheet suction unit 215 and reaches the sheet discharging guide 131. Subsequently, as shown in Fig. 19B, it is guided along the ascending sheet transporting surface 131aa of the warping part 131a, and further to the upper surface of the supporting parts 133.

20 [0038] For this reason, even if the ridge lines and the root lines of the cockling converge toward a portion of the rolled sheet R of which the printing is not yet completed, both side ends of the rolled sheet R, as shown in Figs. 20A and 20B, are lifted by the supporting parts 133, while the rolled sheet R sags at a part of the rolled sheet between the supporting parts 133 by its weight, and is concavely curved. Accordingly, there is no chance that the rolled sheet R rises in the vicinity of the incomplete printing portion of the rolled sheet.

25 [0039] Since the upper surfaces of the supporting parts 133 are flush with the ascending sheet transporting surface 131aa, the rolled sheet can be smoothly transported from the ascending sheet transporting surface 131aa of the warping part 131a to the upper surface of the supporting parts 133, so that the rolled sheet R may be concavely curved reliably. Since the plurality of the supporting parts 133 are arranged such that a length of the arrangement is somewhat narrower than the width of each of the rolled sheets R, even if the rolled sheet R

is changed to another kind of rolled sheet, both side edges of the rolled sheet R can be reliably supported.

[0040] As shown in Figs. 15 through 18, an auxiliary supporting part 134, bar-shaped, for supporting a mid position of the rolled sheet R is provided on the descending sheet transporting surface 131ab of the sheet discharging guide 131 of the ink jet printer 100'. With such the arrangement of the auxiliary supporting part 134, even when the rolled sheet R having a large rigidity is used and is not concavely curved between the supporting parts 133, the rolled sheet R may be convexly curved by the auxiliary supporting part 134 as shown in Figs. 21A and 21B. As a result, the rolled sheet may be concavely curved between the auxiliary supporting part 134 and the supporting parts 133. Accordingly, even the rigidity of the rolled sheet R is large, there is no chance that the rolled sheet R rises in the vicinity of the incomplete printing portion of the rolled sheet.

[0041] While the invention has been described using the printer, it will be readily understood that the invention may be applied to another recording apparatus having the transport guide portion for guiding the transportation of the recording medium, such as facsimile machines and copying machines.

[0042] As seen from the foregoing description, in the printer of the present invention, even if the cockling occurs in a recording medium of which the printing has been completed in the recording unit, the recording medium is bent in a direction orthogonal to directions in which the cockling occurs, and stress acting to spread the rolled sheet in directions of the cockling generation is generated at the bending part. As a result, there is completely eliminated a chance of generating the cockling in the rolled sheet. Both side ends of the rolled sheet in the boundary region between an incomplete printing portion suffering from the cockling and a printed portion are lifted by the supporting parts. Accordingly, the rolled sheet sags at a part of the rolled sheet between the supporting parts by its weight, and is concavely curved. As a result, the rolled sheet does not rise in the boundary region of the rolled sheet. Accordingly, the rubbing of the rolled sheet against the printing head is perfectly prevented, the printing head is reliably protected, and the accuracy of the printing is kept at high level.

Claims

1. A recording apparatus comprising:

a feeding unit for storing and feeding a recording medium;
a recording unit for recording information on said recording medium being fed from said feeding unit;
a discharging unit discharging said recording medium transported through said recording unit;

a guide member forming a sheet transporting surface disposed on a downstream side of said recording unit in a transporting direction of said recording medium and said guide member being inclined to the gravity direction;
a warping part for warping said recording medium formed on said guide member.

2. A recording apparatus according to claim 1, wherein said warping part includes a flat surface which is uniform over a direction orthogonal to said medium transporting direction.

3. A recording apparatus according to claim 1, further comprising a sheet suction unit for sucking said recording medium disposed near said warping part.

4. A recording apparatus according to claim 1, further comprising a sheet discharge roller for discharging said recording medium disposed immediately after said warping part.

5. A recording apparatus according to claim 1, wherein said warping part includes an inclined recording medium transporting surface for changing the transporting direction of said recording medium to thereby warp said recording medium.

6. A recording apparatus comprising:

a feeding unit for storing and feeding recording medium;
a recording unit for recording information on said recording medium fed from said feeding unit;
a discharging unit for discharging outside said recording medium transported through said recording unit;
a guide member forming a sheet transporting surface disposed on a downstream side of said recording unit in a transporting direction of said recording medium;
a warping part for warping said recording medium formed on said guide member; and
supporting parts formed on said guide member, said supporting parts supporting both side edges of said recording medium warped by said warping part.

7. A recording apparatus according to claim 6, wherein said warping part includes an inclined recording medium transporting surface for changing the transporting direction of said recording medium to thereby warp said recording medium, and said supporting parts have support surfaces which are flush with said recording medium transporting surface.

8. A recording apparatus according to claim 6, where-

in a plurality of said supporting parts are arranged such that a length of the arrangement of said supporting parts is narrower than each of said recording medium of the different widths.

5

9. A recording apparatus according to claim 7, wherein an auxiliary supporting part for supporting both side edges of said recording medium is provided on said recording medium transporting surface.

10

10. A recording apparatus according to claim 5, wherein said inclined, a recording medium transporting surface of said warping part is formed by bending a plate like member in a direction orthogonal to said medium transporting direction.

15

11. A recording apparatus according to claim 1, wherein said warping part is warped so that the printing surface of said recording medium is concavely curved.

20

12. A recording apparatus according to claim 11, wherein an inclination angle of said inclined recording medium transporting surface of said warping part is 6°.

25

13. A recording apparatus according to claim 1, wherein said warping part includes a first sheet transporting surface ascendingly inclined and a second sheet transporting surface descendingly inclined with respect to the sheet transporting path of said recording medium.

30

35

40

45

50

55

FIG. 1

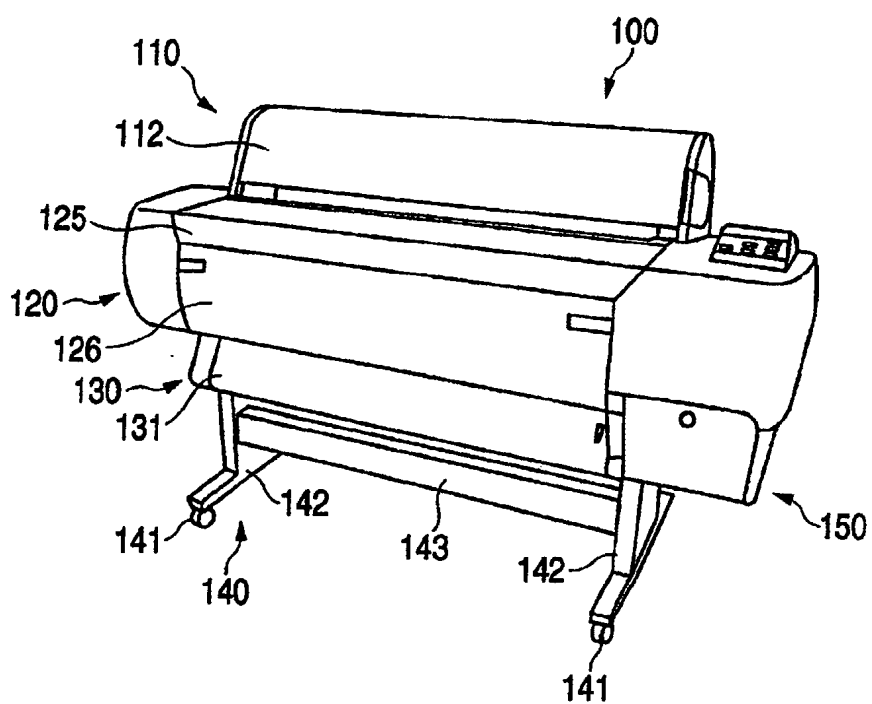


FIG. 2

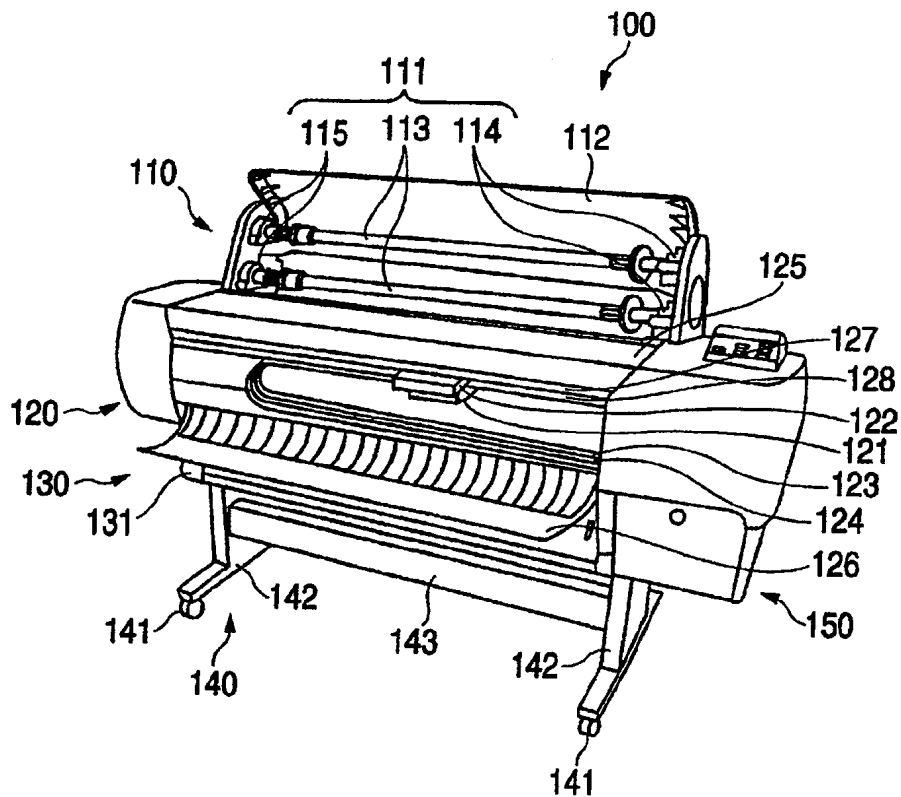


FIG. 3

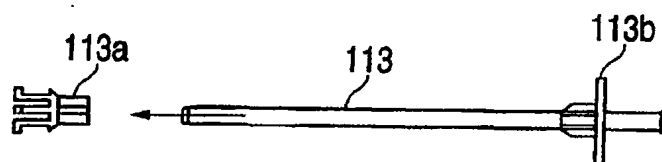


FIG. 4

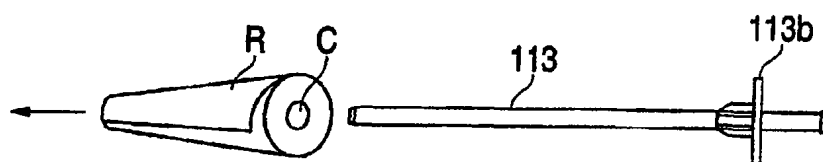


FIG. 5

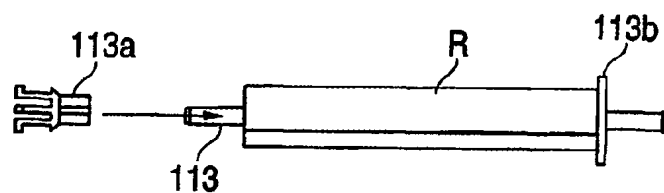


FIG. 6

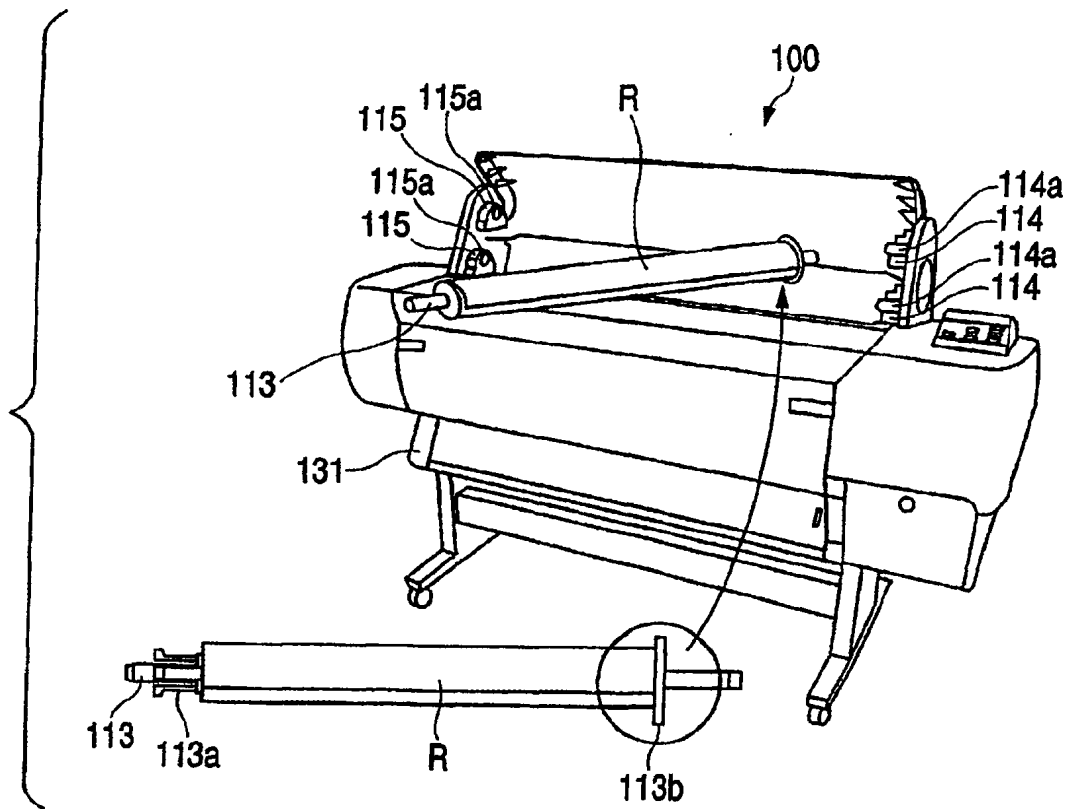


FIG. 7

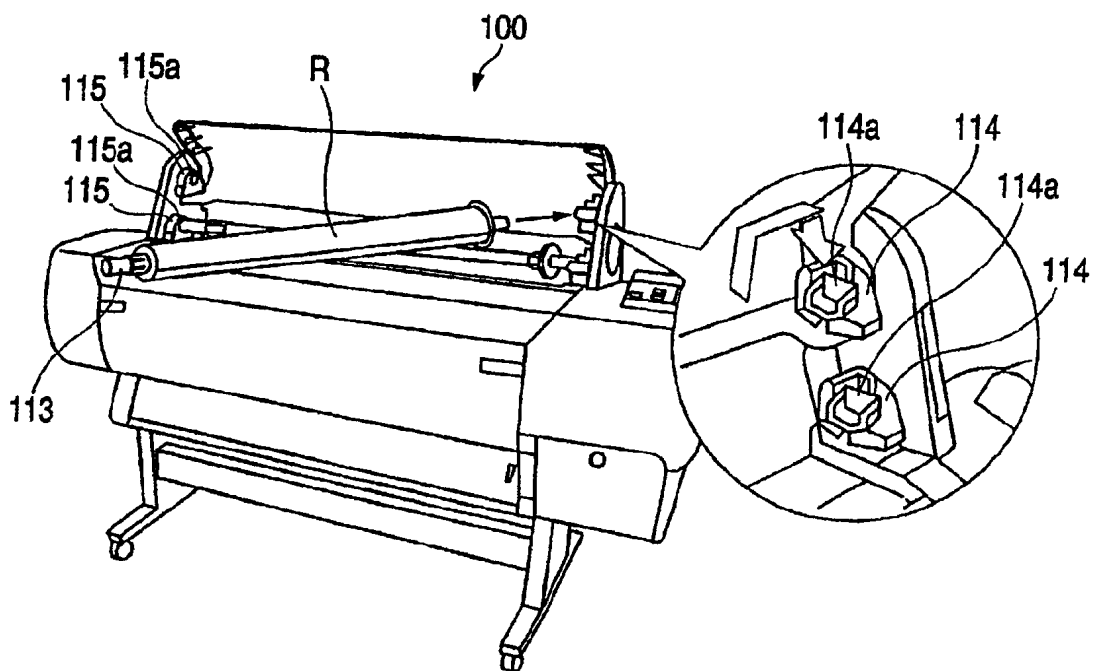


FIG. 8

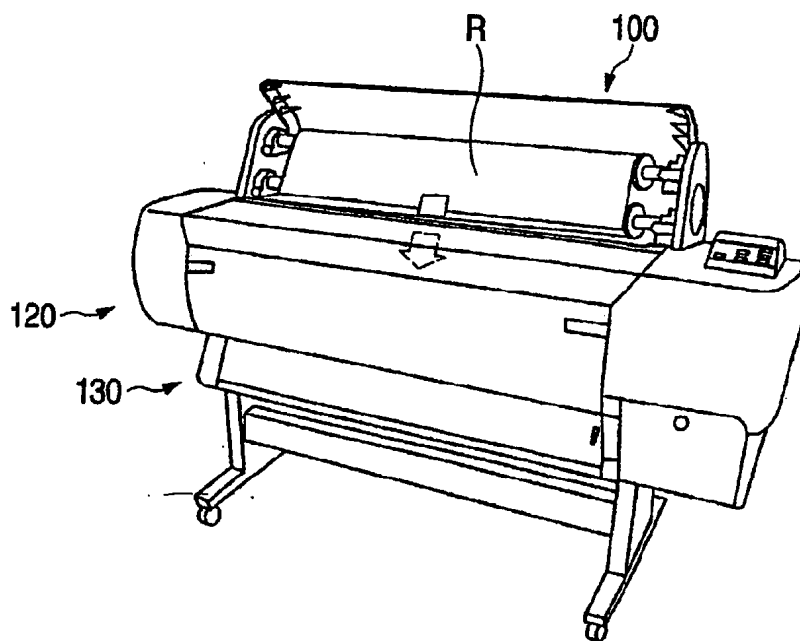


FIG. 9

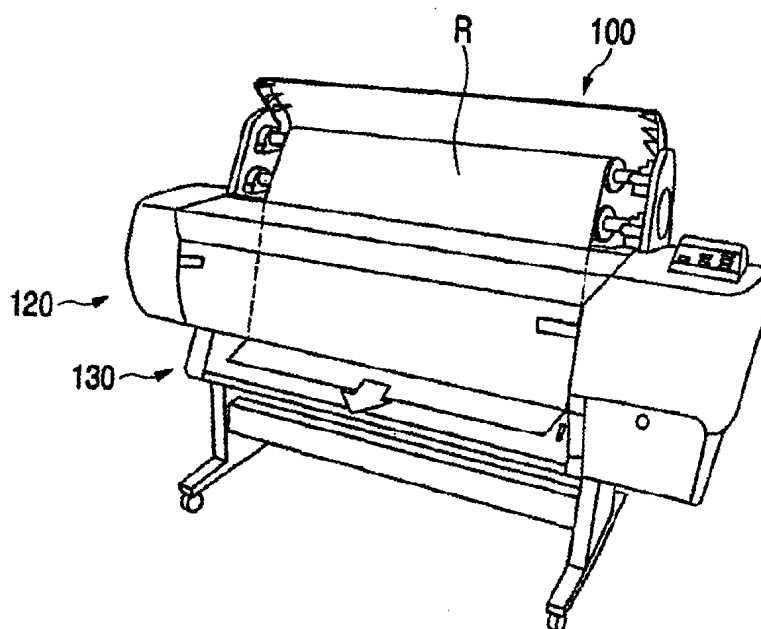


FIG. 10

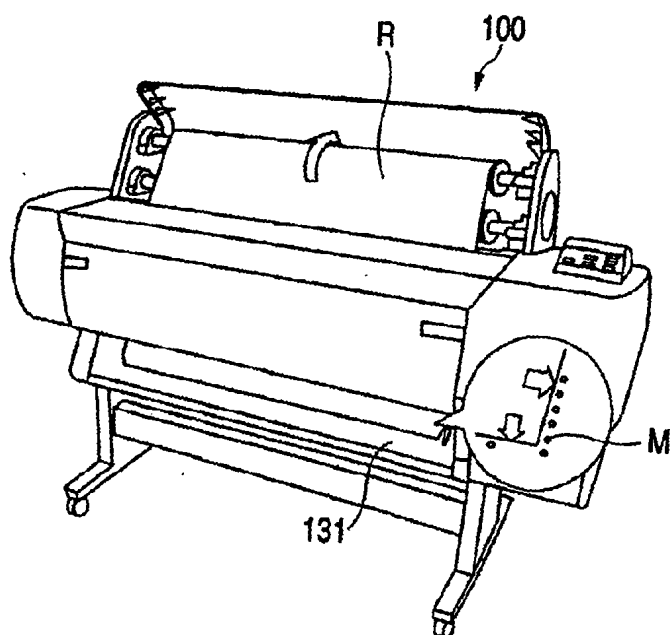


FIG. 11

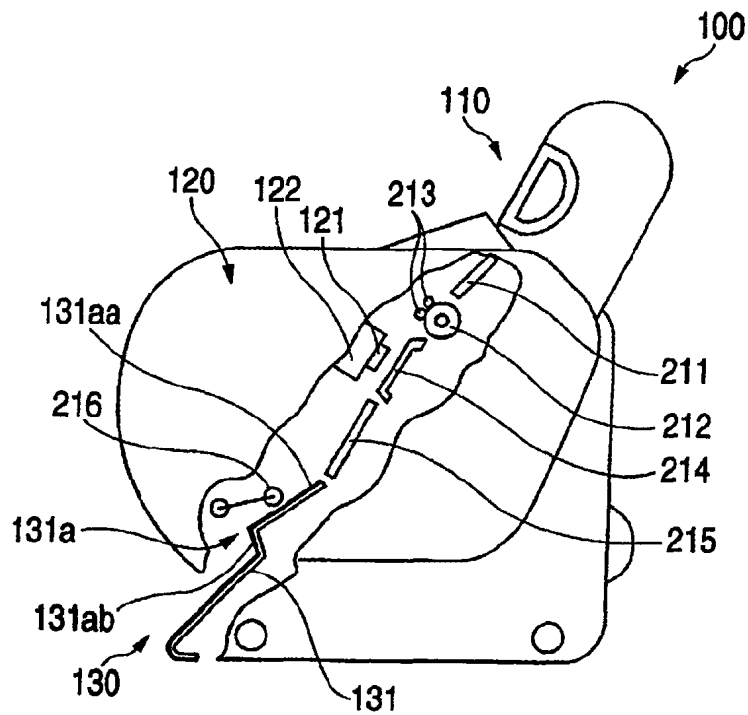


FIG. 12

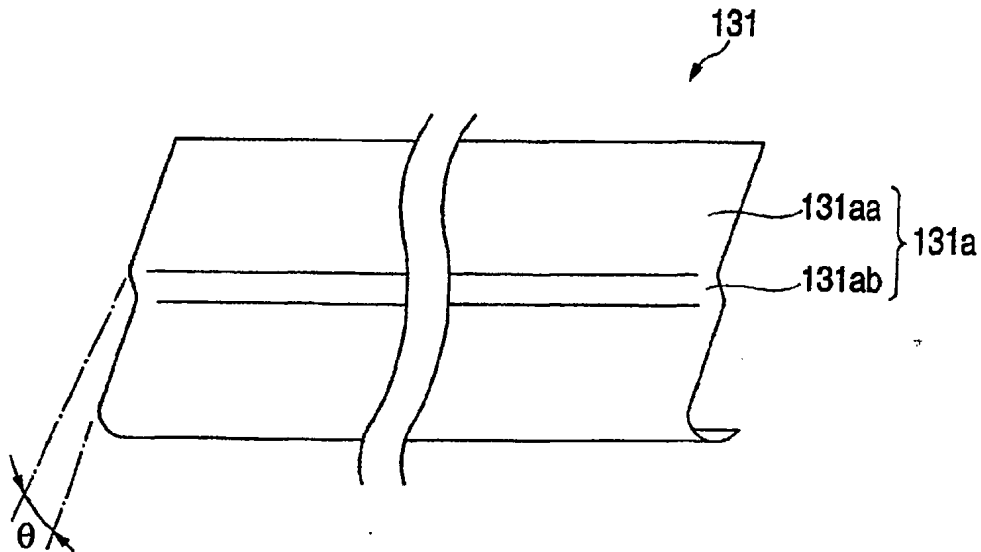


FIG. 13A

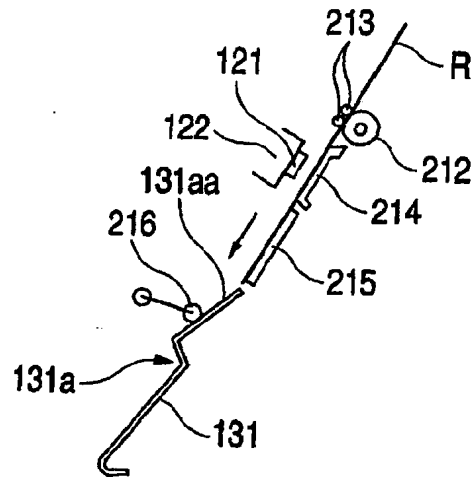


FIG. 13B

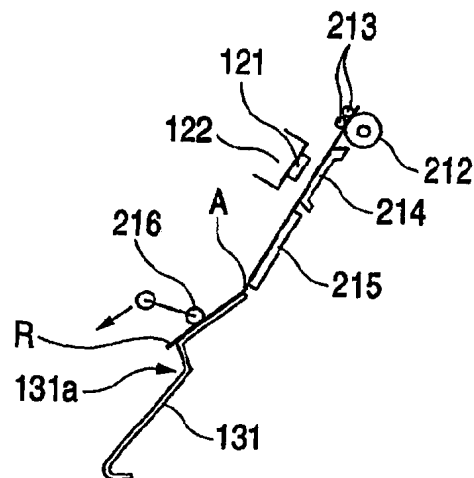


FIG. 14

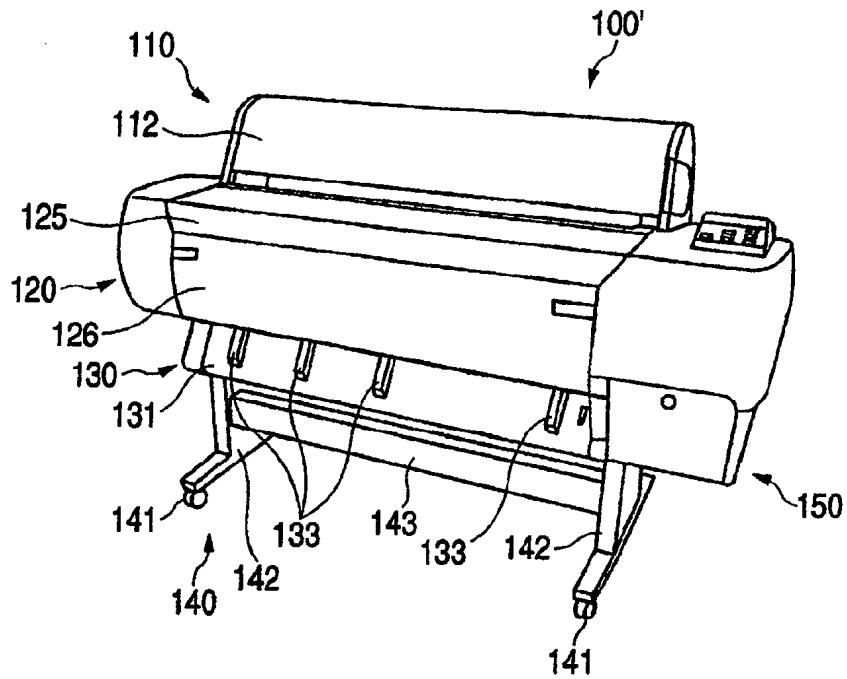


FIG. 15

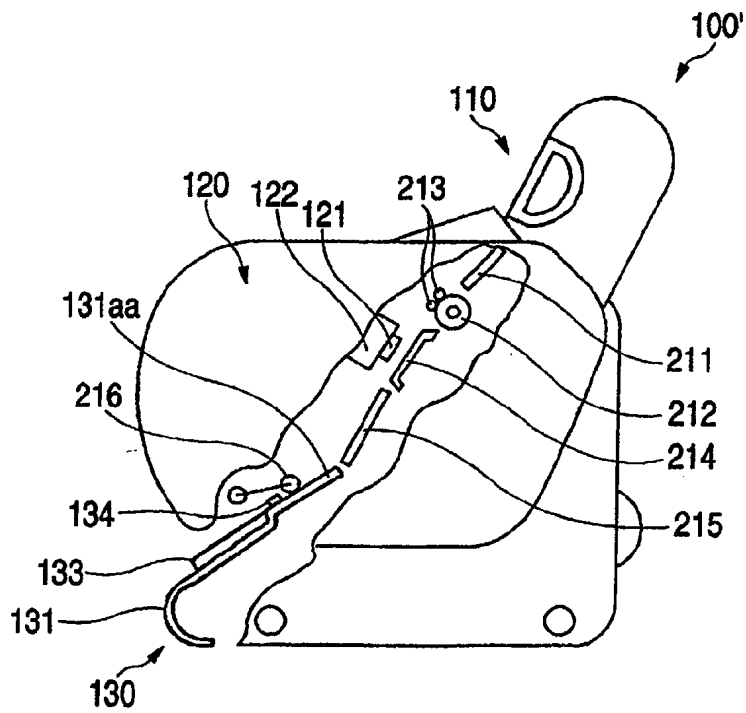


FIG. 16

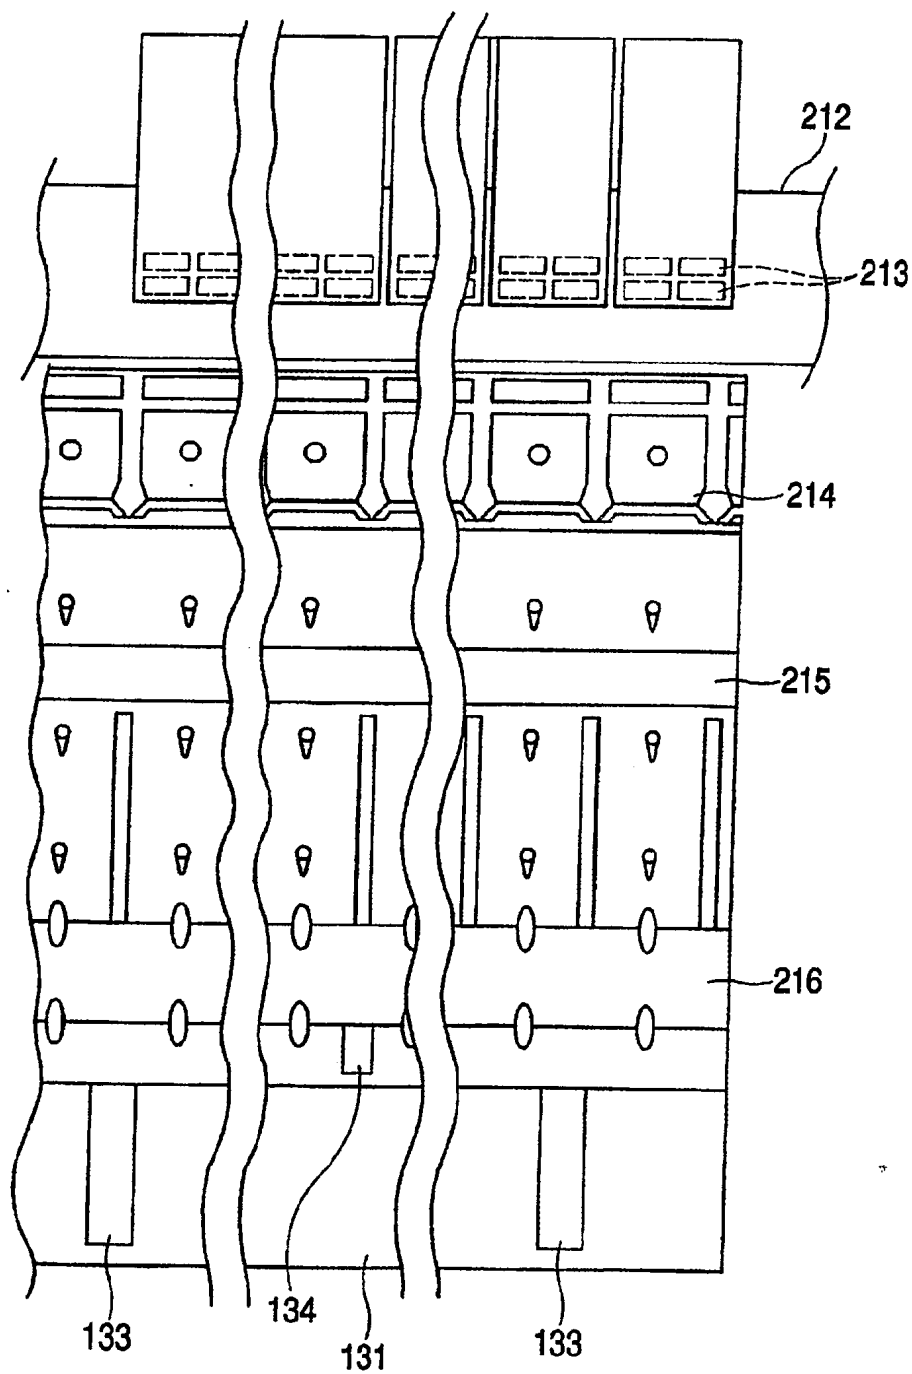


FIG. 17

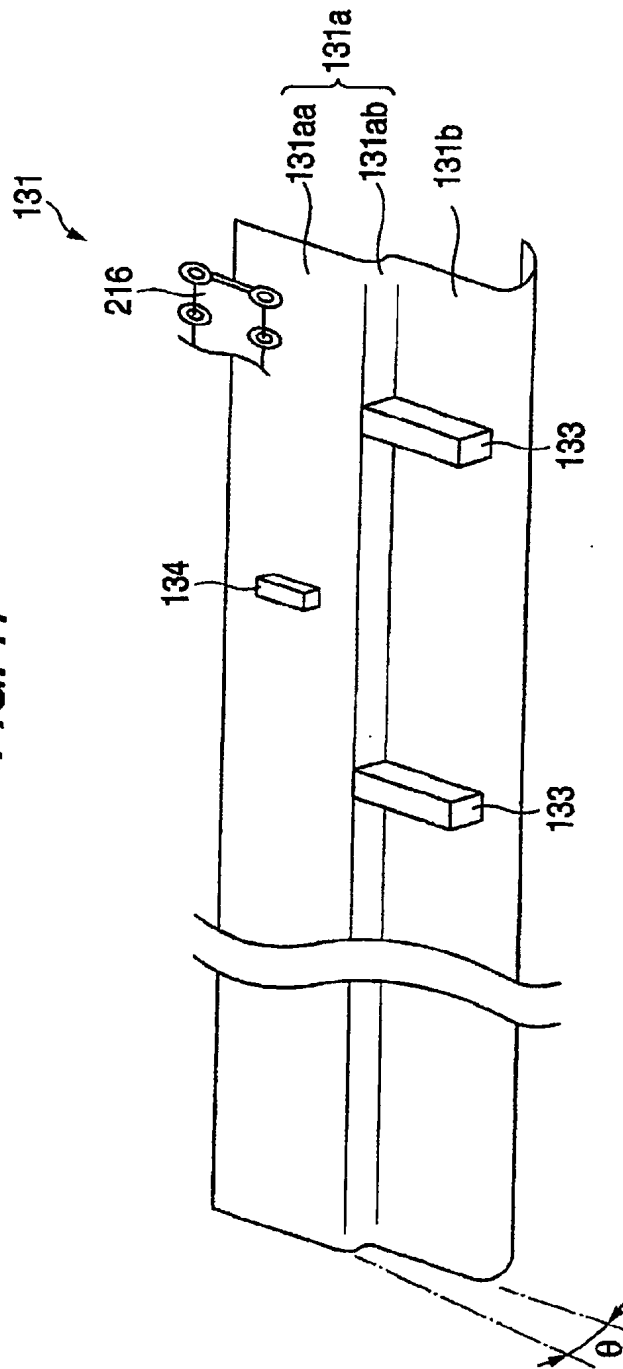


FIG. 18

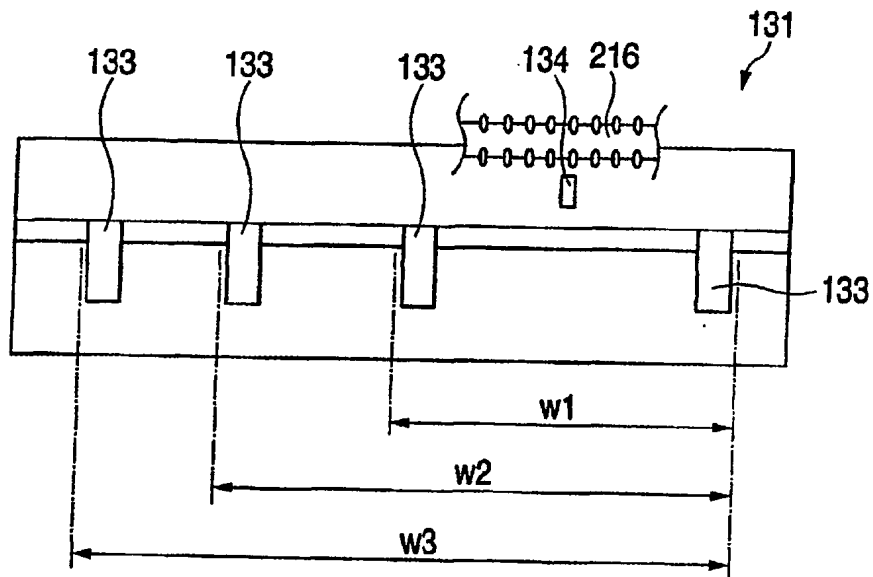


FIG. 19A

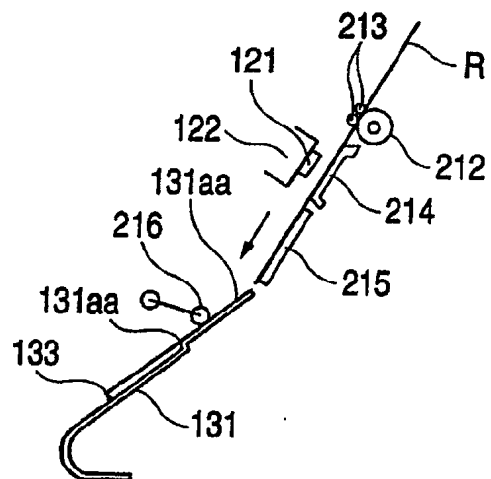


FIG. 19B

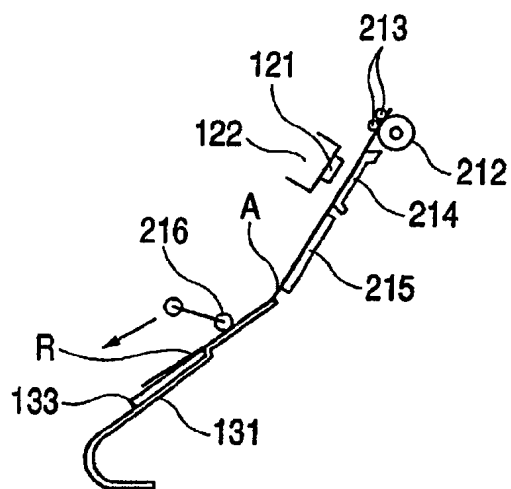


FIG. 20A

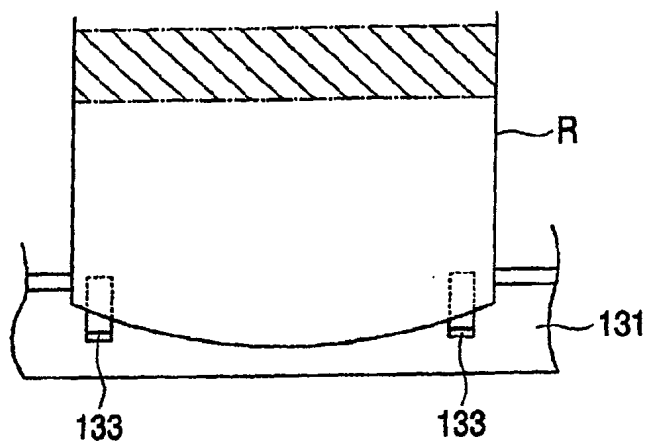


FIG. 20B



FIG. 21A

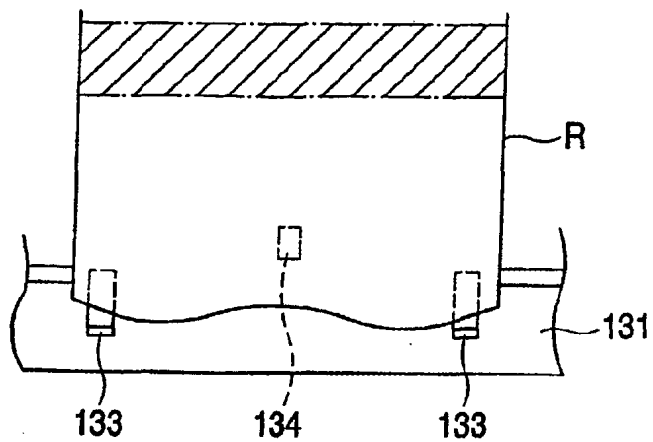


FIG. 21B

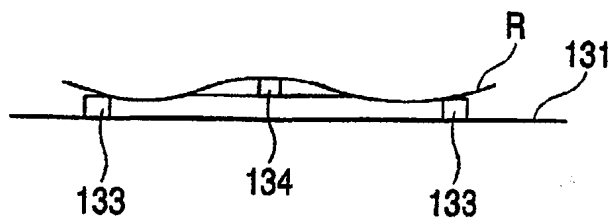


FIG. 22A


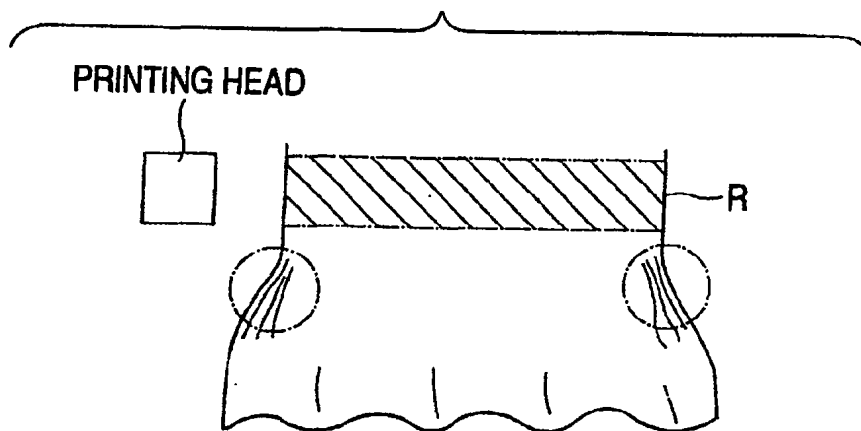


FIG. 22B

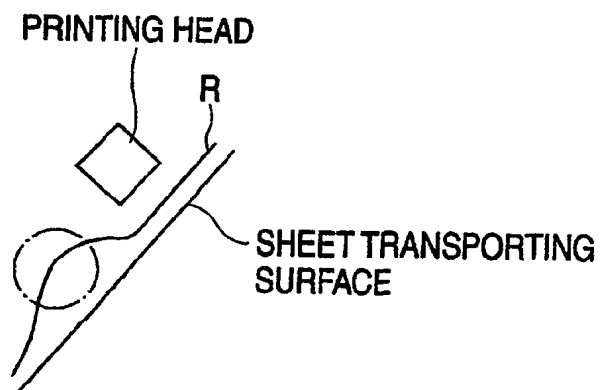

European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 01 13 1029

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	EP 0 927 640 A (SEIKO EPSON CORP) 7 July 1999 (1999-07-07) * column 3, line 28 - column 4, line 17; claims 1-3,5; figures 2,3A-D *	1,2,4-9	B41J15/16 B41J13/14 B65H23/04
A	EP 0 611 719 A (RISO KAGAKU CORP) 24 August 1994 (1994-08-24) * figure 9 *	6-9	
X	EP 0 676 296 A (CANON KK) 11 October 1995 (1995-10-11) * column 3, line 43 - line 44 * * column 15, line 46 - line 53; claims 1,2,7; figures 2,9 *	1-5, 10-12	
X	EP 0 982 254 A (HEWLETT PACKARD CO) 1 March 2000 (2000-03-01) * column 3, line 26 - line 52; figure 3 * * column 7, line 44 - line 55 *	1,5	
A		12,13	
A	PATENT ABSTRACTS OF JAPAN vol. 1999, no. 10, 31 August 1999 (1999-08-31) & JP 11 138769 A (BROTHER IND LTD), 25 May 1999 (1999-05-25) * abstract *	1-13	TECHNICAL FIELDS SEARCHED (Int.Cl.7) B65H B41J
The present search report has been drawn up for all claims			
Place of search MUNICH		Date of completion of the search 14 March 2002	Examiner Uhlig, R
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

EPC FORM 1503 03.02 (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 13 1029

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-03-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 0927640 A	07-07-1999	JP 3022849 B2	21-03-2000
		JP 11245457 A	14-09-1999
		DE 69900071 D1	10-05-2001
		DE 69900071 T2	09-08-2001
		EP 0927640 A2	07-07-1999
		US 6183152 B1	06-02-2001
EP 0611719 A	24-08-1994	JP 3213424 B2	02-10-2001
		JP 6239002 A	30-08-1994
		DE 69400235 D1	18-07-1996
		DE 69400235 T2	13-02-1997
		EP 0611719 A1	24-08-1994
		US 5404805 A	11-04-1995
EP 0676296 A	1-10-1995	JP 7323622 A	12-12-1995
		DE 69519119 D1	23-11-2000
		DE 69519119 T2	17-05-2001
		EP 0676296 A1	11-10-1995
		US 6092892 A	25-07-2000
		US 6293670 B1	25-09-2001
EP 0982254 A	01-03-2000	US 6042106 A	28-03-2000
		EP 0982254 A2	01-03-2000
		JP 2000086058 A	28-03-2000
JP 11138769 A	25-05-1999	NONE	

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82